




WL183 WL184 WL185

Lavalier Condenser Microphone

The Shure lavalier condenser microphones, WL183, WL184, and WL185, user guide.
Version: 2.1 (2021-C)

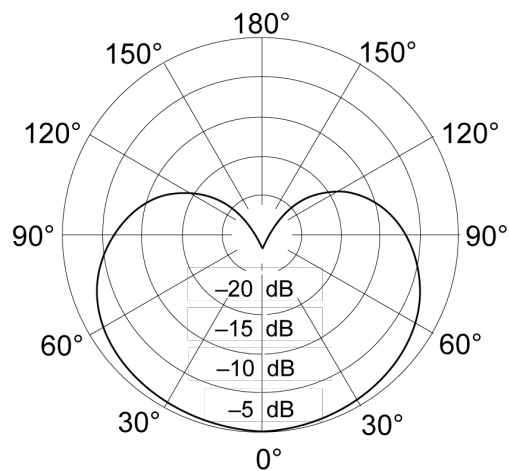

CARDIOID (WL185)

Specifications

Type

Condenser (electret bias)

Frequency Response

50 to 17,000 Hz

Output Impedance

1800 Ω

Sensitivity [1]

| | |
|--------------|--------------|
| WL183 | -40.0 dBV/Pa |
| WL184 | -44.5 dBV/Pa |
| WL185 | -45.5 dBV/Pa |

Maximum SPL

| | |
|--------------|--------------|
| WL183 | 125.0 dB SPL |
| WL184 | 129.5 dB SPL |
| WL185 | 130.5 dB SPL |

Self Noise (A-Weighted):

| | |
|--------------|-------------|
| WL183 | 22.5 dB SPL |
| WL184 | 27.0 dB SPL |
| WL185 | 28.0 dB SPL |