

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response:	50 Hz ÷ 20000 Hz
	Max SPL @ 1m:	133 dB
	Horizontal coverage angle:	60°
	Vertical coverage angle:	60°
Transducers	Compression Driver:	Coaxial 1.5" neo, 2.5" v.c
	Woofers:	Coaxial 15" neo, 3.5" v.c
Input/Output section	Input signal:	bal/unbal
	Input connectors:	XLR, RDNet Ethercon
	Output connectors:	XLR, RDNet Ethercon
	Input sensitivity:	-2 dBu/+4 dBu
Processor section	Crossover Frequencies:	900 Hz
	Protections:	Thermal, HF
	Limiter:	Soft Limiter
	Controls:	Proces., 8 sel. presets
	RDNet:	Yes
Power section	Total Power:	2200 W Peak, 1100 W RMS
	High frequencies:	600 W Peak, 300 W RMS
	Low frequencies:	1600 W Peak, 800 W RMS
	Cooling:	Convection
	Connections:	Powercon IN/OUT
Standard compliance	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	Baltic birch plywood
	Handles:	1 Top
	Pole mount/Cap:	Yes
	Grille:	Steel
	Color:	Black
Size	Height:	353 mm / 13.9 inches
	Width:	580 mm / 22.83 inches
	Depth:	486 mm / 19.13 inches
	Weight:	18 kg / 39.68 lbs
Shipping informations	Package Height:	615 mm / 24.21 inches
	Package Width:	390 mm / 15.35 inches
	Package Depth:	515 mm / 20.28 inches
	Package Weight:	23 kg / 50.71 lbs



PART NUMBER

- **13000449**

TT 25-CXA

115V


EAN 8024530013028

- **13000448**

TT 25-CXA

220-240V

EAN 8024530012977

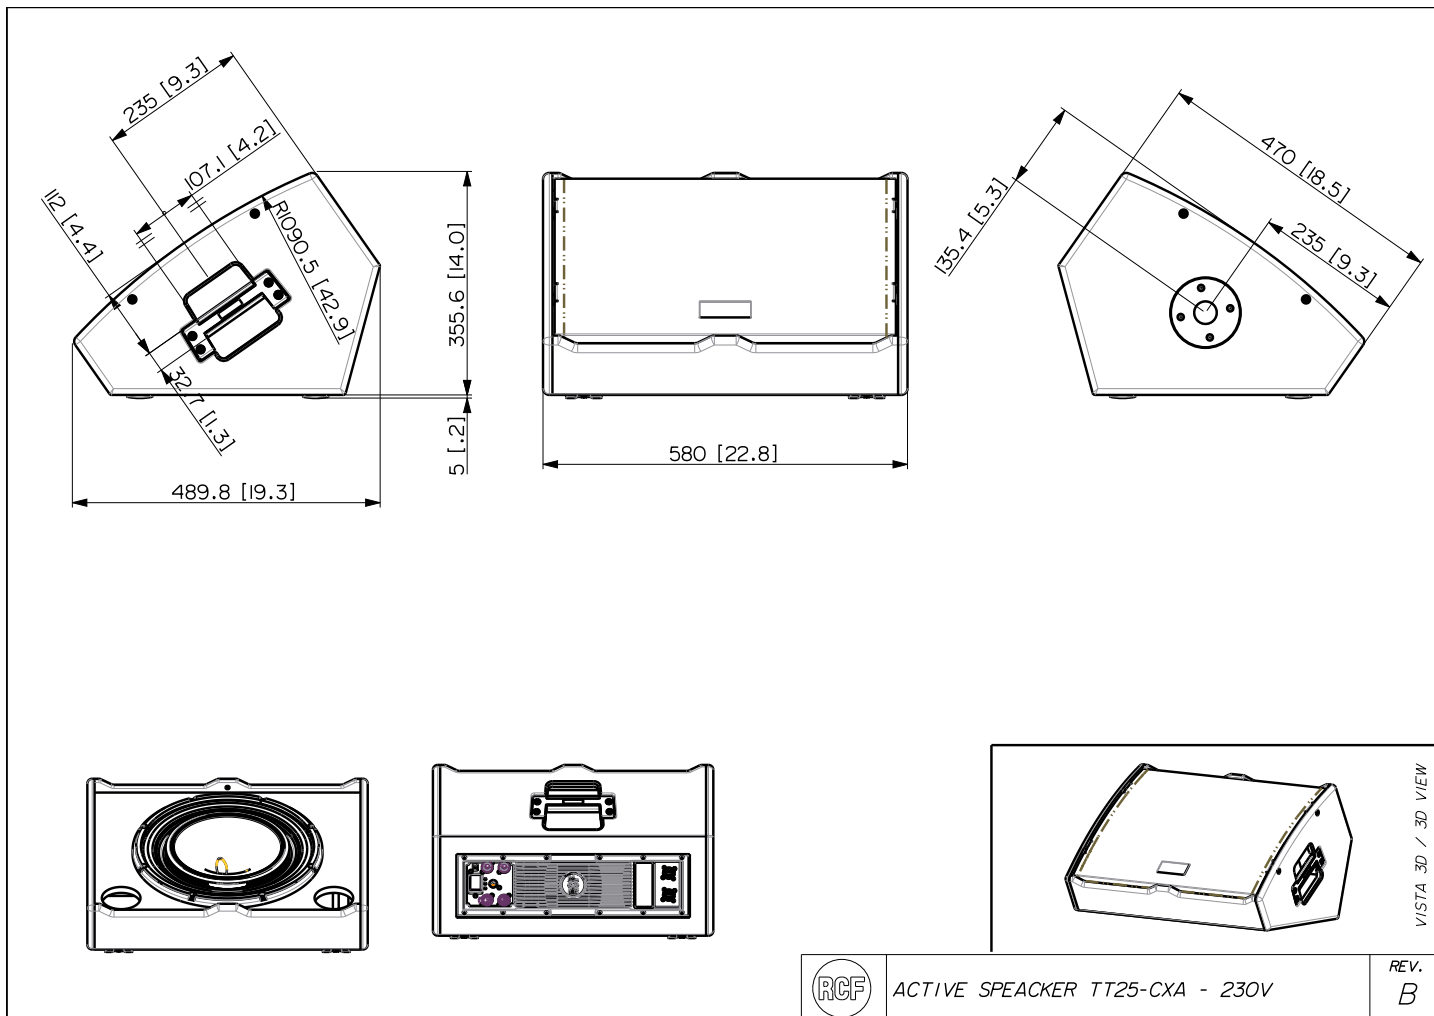

ACTIVE SPEAKER TT25-CXA - 230V

REV.
B